


RECESSED FLANGE ISOLATORS

Recessed Flange Isolators designed for high load capacity combined with relatively large static deflections in an axial direction. Their high loading for a given size is obtained by utilising the rubber to the best advantage in both compression and shear.


Isolators listed in the following pages are normally assembled with overload and rebound washers to control and limit the movement of the suspended equipment under the action of shock loads. The central fixing bolts should be torque tightened to the recommended values.

Supplied with overload and rebound washers


M137061,2,3

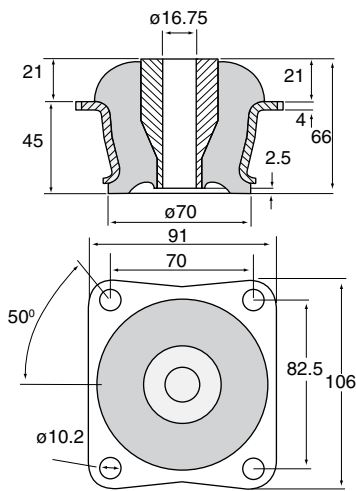

M137082,3

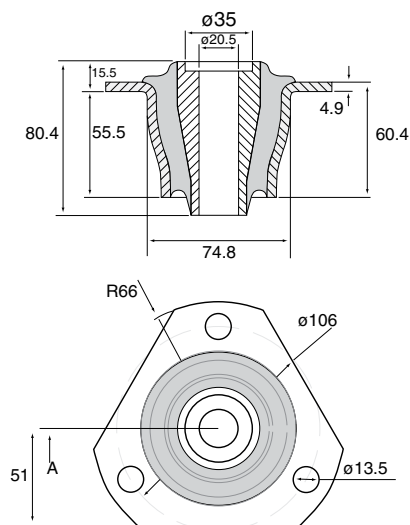

M137101,2,3

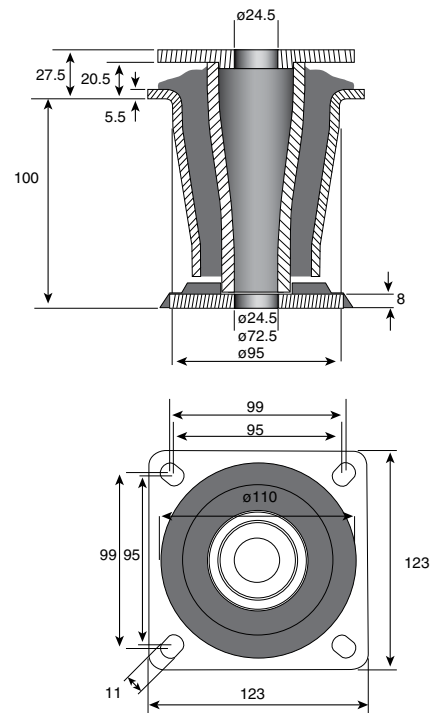

Part No.	Duro	Load Kg	Deflection mm	Weight Kg
M137063	50	310	6.5	1.18
M137061	60	500	6.0	1.18
M137062	70	960	6.0	1.18
M137082	60	690	6.0	1.21
M137083	70	1080	6.0	1.21
M137101	45	1000	6	3.45
M137102	60	2100	6	3.45
M137103	70	2500	6	3.45


All properties nominal, contact Mackay for Technical advice

All Dimensions in Millimetres

© Mackay Consolidated Industries Pty Ltd 2015
www.mackayrubber.com.au


M801550

Overload and rebound washers ordered separately

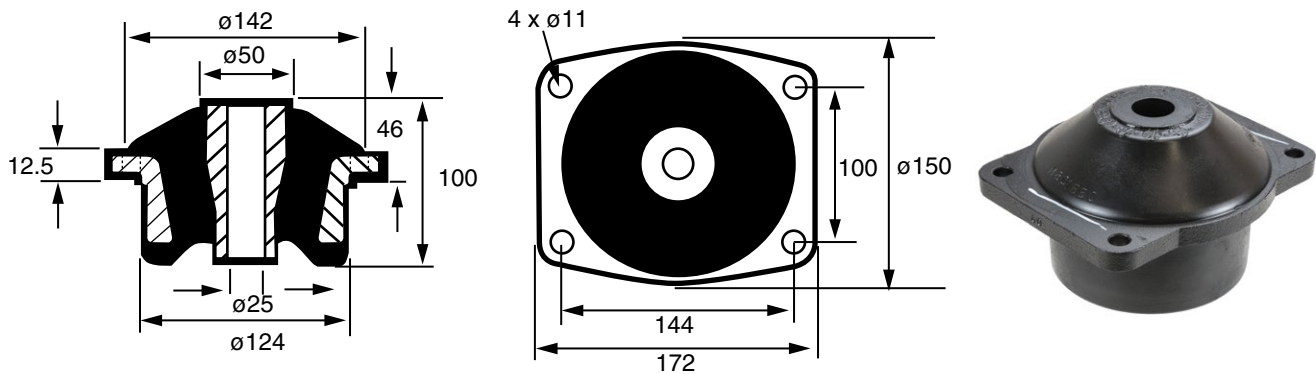

Part No.	No. OF FIXING HOLES	OVERLOAD WASHER	REBOUND WASHER	CENTRE BOLT SIZE & ASSEMBLY TORQUE		WEIGHT Kg
M801550	4	M181550C	M181550C	M24	260Nm	4.5

SELECTION CHART for the following RECESSED FLANGE ISOLATORS M801550

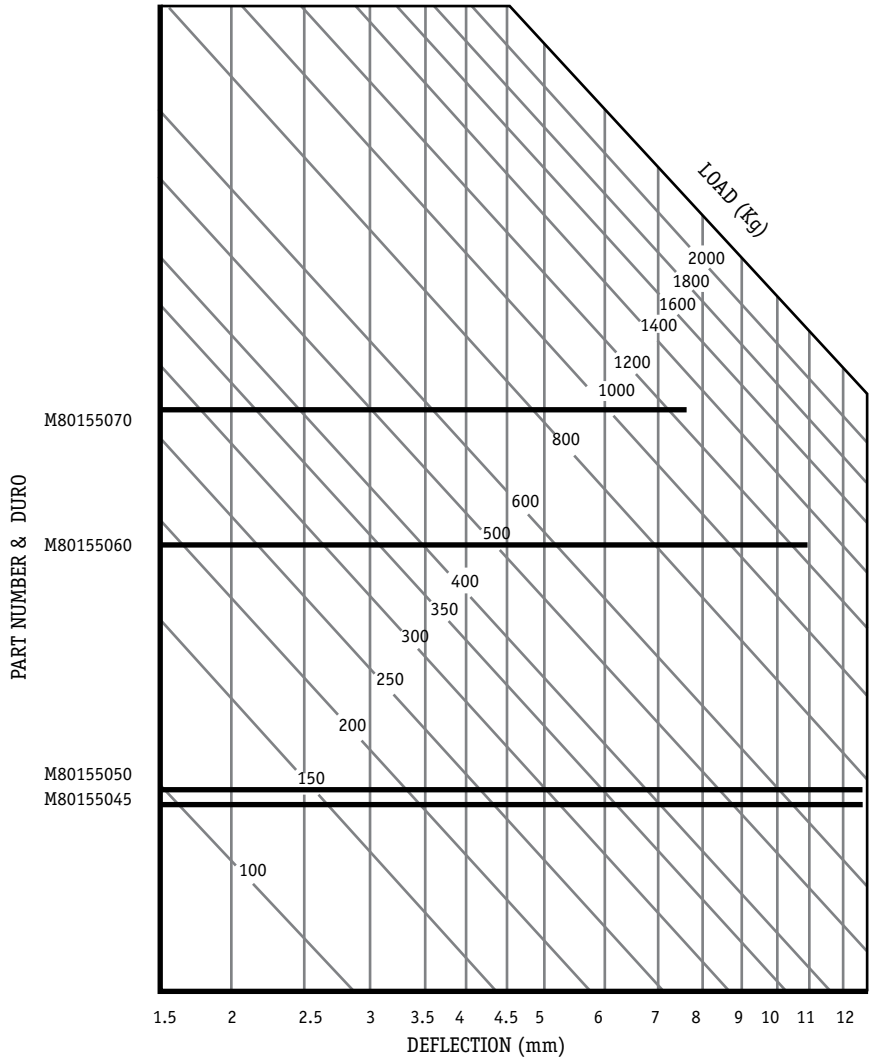

COLOUR CODE

Duro	Colour
45	Blue
50	Pink
60	White
70	Orange

All properties nominal, contact Mackay for Technical advice


All Dimensions in Millimetres

TYPICAL METHODS OF INSTALLATION FOR METACONE ISOLATORS

A. Note; Washer must be clear of rebound buffer in static load condition. Spacer washers should be introduced if necessary to provide adequate clearance.


B. Ensure clearance between rebound washer and outer metal under static load.

C. On Part No. M17146 it is essential that lower end of outer metal is located in bracket which also provides reaction face for rebound buffer.

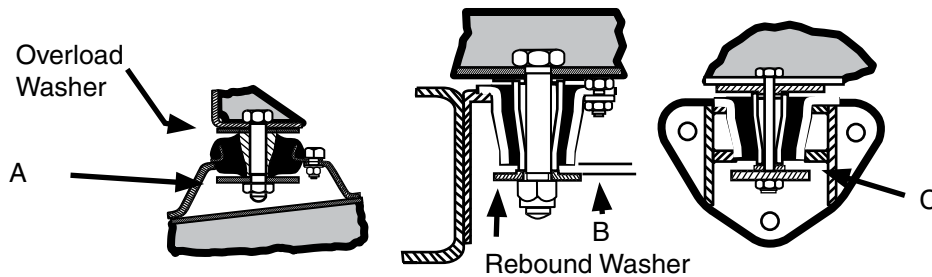


M80409

NOTE: M80409 may or may not require overload and rebound washers depending on the installation. (supplied separatley)

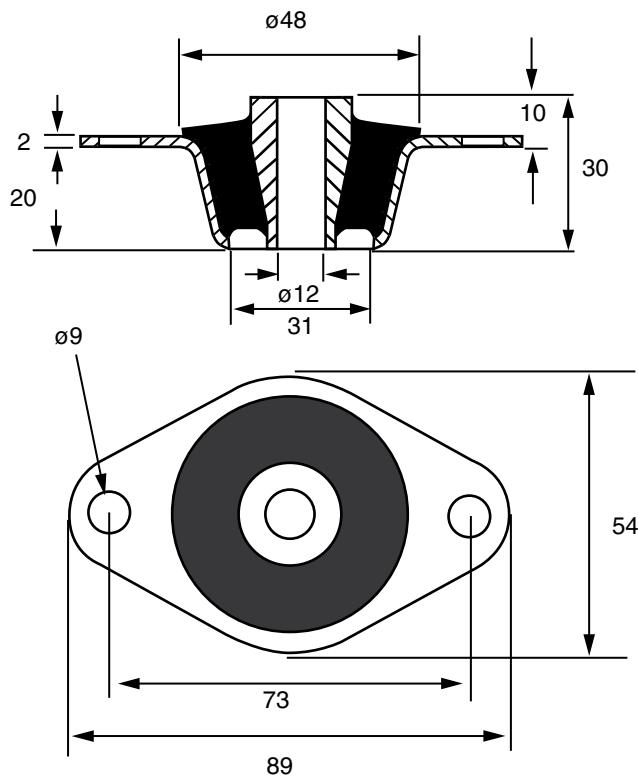

SELECTION CHART

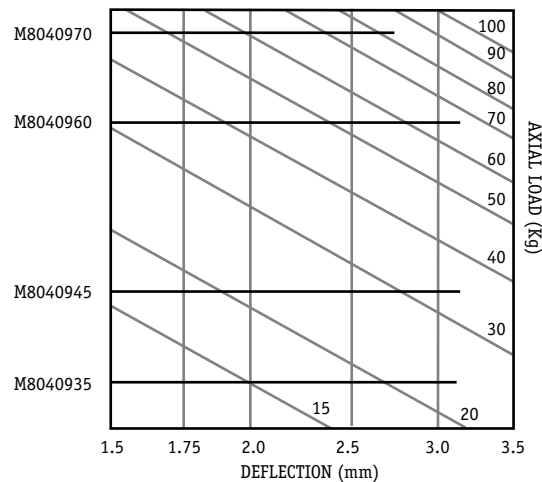

DUROMETER

Duro	
35	Stamped into flange
45	
60	
70	

Part No.	No. of fixing holes	Overload Washer	Rebound Washer	Centre Bolt Size & Assembly Torque	Weight Kg
M80409	2	M18409A	M15286	M12 40Nm	0.1


All properties nominal, contact Mackay for Technical advice

All Dimensions in Millimetres

© Mackay Consolidated Industries Pty Ltd 2015
www.mackayrubber.com.au

M70675


M70675 is a one piece recessed flange isolator that provides a low profile method of supporting a range of equipment. Their fail safe feature protects supported equipment under shock loads

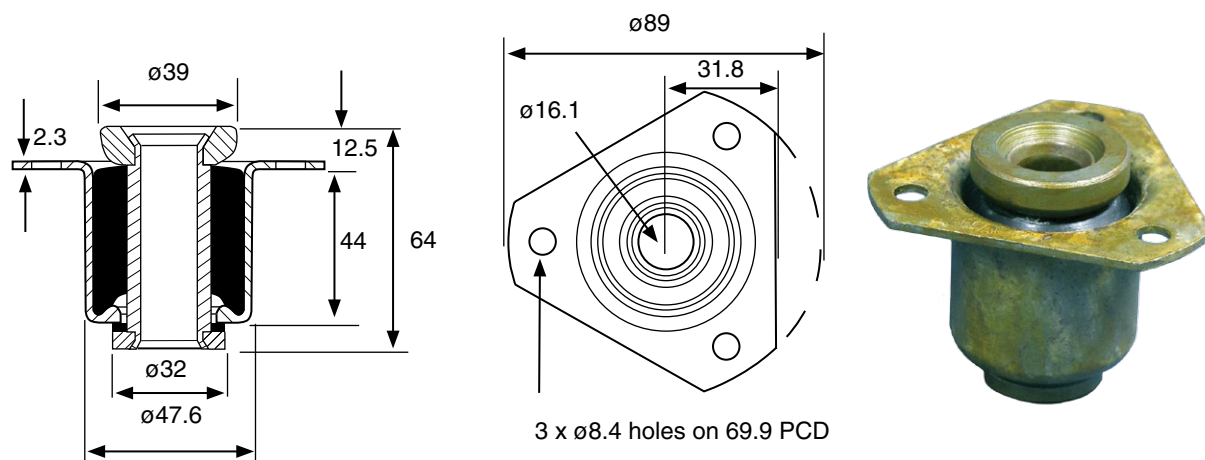

Part No.	Compression		Weight Kg
	Kg	Def mm	
M70675	100	1.0	0.4
	147	1.63	0.4
	200	2.3	0.4

Q - MOUNTS

Non Stocked Item - Special Order Only

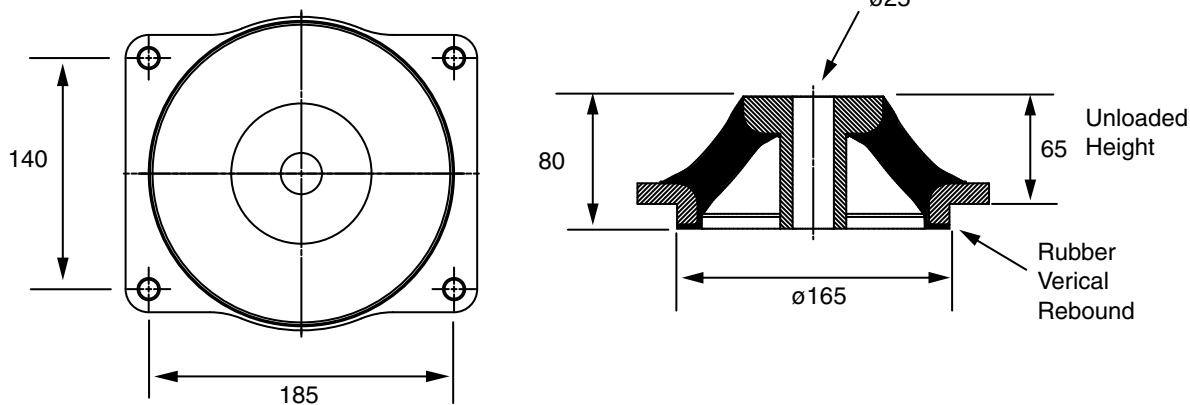

Part No.	Max Vertical Load Kg	Max Vertical Deflection mm	Rebound Cup Installed		Weight Kg
			Optimum Load Kg	Design Deflection mm	
M9030060	850	20	425	10	4.1
M9030068	1230	20	615	10	4.1
M9030075	1790	20	895	10	4.1
M90300W					


All properties nominal, contact Mackay for Technical advice

© Mackay Consolidated Industries Pty Ltd 2015
www.mackayrubber.com.au

All Dimensions in Millimetres


Q MOUNT REBOUND CUP

Non Stocked Item - Special Order Only

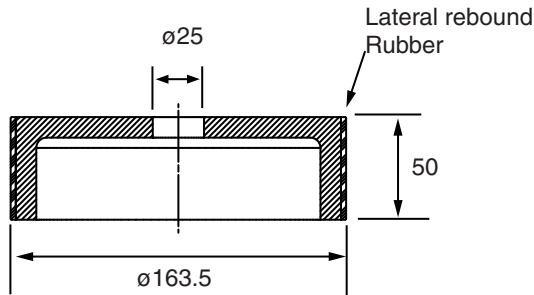



Q - Mount rebound cup is specifically deigned to fit into a recess providing rebound protection in vertical loading and lateral bump stop facility.
Lateral clearance 10 mm maximum

REBOUND CUP INSTALLATION AT OPTIMUM LOAD

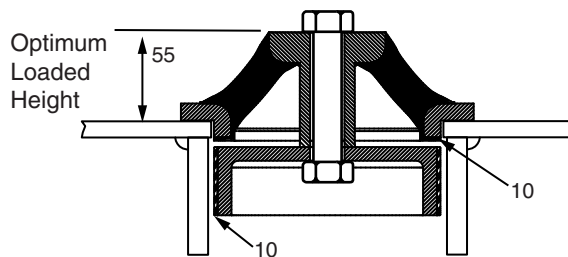

INTEGRAL REBOUND (Type 304 Stainless Steel)

Designed for recessed fitting into chassis and frames. Integral overload and rebound washers eliminate the need for additional bump stops. Ideally suited to mounting exposed equipment

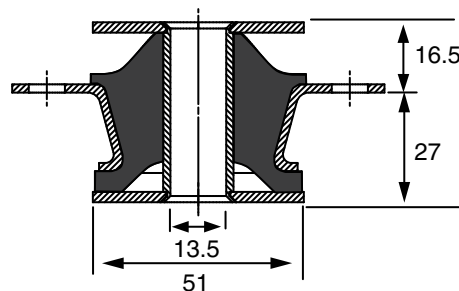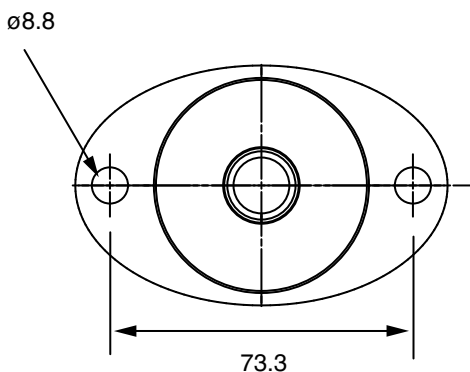

DUROMETER

Duro	
50	Stamped into Flange
65	

Part No.	Max Load Kg	Deflection mm	Weight Kg
M70250	90	6	0.25
M70265	180	6	0.25

All properties nominal, contact Mackay for Technical advice


All Dimensions in Millimetres

© Mackay Consolidated Industries Pty Ltd 2015
www.mackayrubber.com.au


OVERLOAD AND REBOUND WASHERS

Overload and rebound washers (top and Bottom) are necessary to limit maximum movement in the event of shock loading.


Type A
Steel washer



Type B
Top Stepped Steel Washer



Type C
Rebound Washer with Rubber



Part No.	TYPE	A	B	C	D	E	Top Washer Overload	Bottom Washer Rebound	Weight Kg
M15286	C	48	12	3	6	28.5		M80409	0.1
M153526	C	95	25	6	14	47			
M153527	C	117	25	6	16	48			
M153528	C	67	20	5	10	35			0.2
M18146C	B	116	25	4	8	47			
M181550C	A	139	25	10			M801550	M801550	1.15
M18168C	B	155	25	4	8	47			
M18225H	B	80	20	3	6	34.5			0.25
M18409A	A	50	12	4			M80409		0.07

RECOMMENDED TIGHTENING TORQUE FOR CENTRE FIXING BOLTS

THREAD SIZE	TORQUE (Nm)
M10	25
M12	40
M16	135
M20	180
M24	260

All properties nominal, contact Mackay for Technical advice

© Mackay Consolidated Industries Pty Ltd 2015
www.mackayrubber.com.au

All Dimensions in Millimetres

