


DOCK - FENDERING RUBBER


Part No.	A mm	B mm	C* mm	Nominal Wall Thickness mm	Weight Kg
DR504003	50	40	300	10	0.33
DR504010	50	40	1000	10	1.4
DR756503	75	65	300	12	0.8
DR756510	75	65	1000	12	2.8
DR1059503	105	90	300	18	1.3
DR1059510	105	90	1000	18	5.6

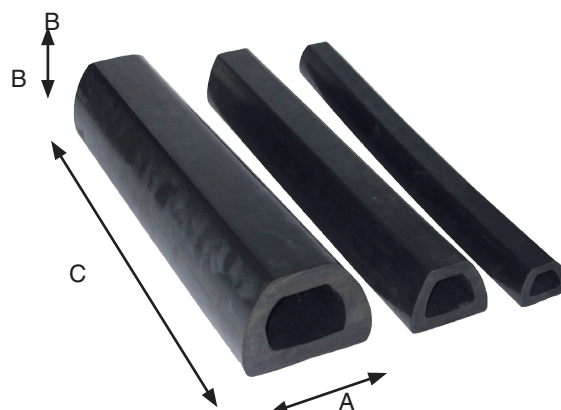

HIGH VISIBILITY DOCKING RUBBER

Part No.	A mm	B mm	C* mm	Length	Weight Kg
DRY50501200	50	50	25	1200	1.92
DRY75701200	75	70	45	1200	3.12
DRY100951200	100	92	50	1200	7.20


* Also available in selected lengths

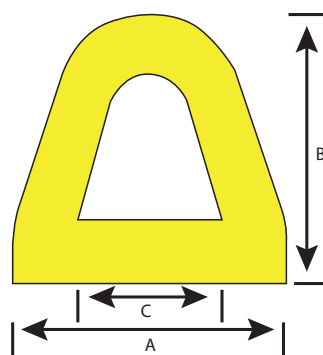

SLING PROTECTOR

A textile reinforced fully vulcanised high grade cut and abrasion resistant rubber sling and goods protector.

Suits webbing up to 90mm wide

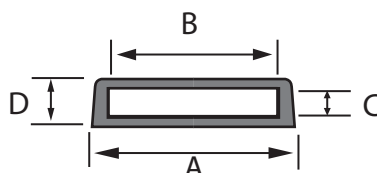

Sling not Included



Part No.	A mm	B mm	C mm	D mm	LENGTH mm	Weight KG
MACSLEEVE	115	95.2	15	27	1090	1.5

RUBBER WHEEL CHOCKS

Part No.	A mm	B* mm	C mm
WCS100	140	100	80
WCM150	155	150	125
WCL150	270	155	150
WCXL400	275	400	155

Mackay wheel chocks are made from moulded black EPDM rubber providing high UV resistance providing longer life. Available in multiple sizes, suitable for light and heavy duty vehicles such as cars, utes, caravans, buses and trucks. Always use wheel chocks in pairs.

* Also available in selected widths

All properties nominal, contact Mackay for Technical advice

All Dimensions in Millimetres

