



BONDED BUFFERS

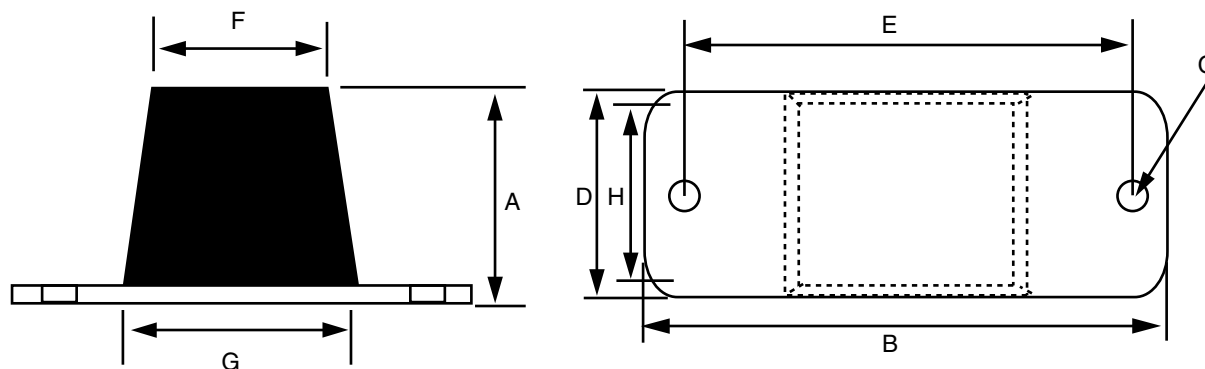

Part No.	A	B	C	D	E	F	G	H	STATIC LOAD Kg	DEF mm	BUFFING LOAD Kg	DEF mm	Weight Kg
M176	73	127	10	44	101	51	76	32	87	10	200	20	0.3

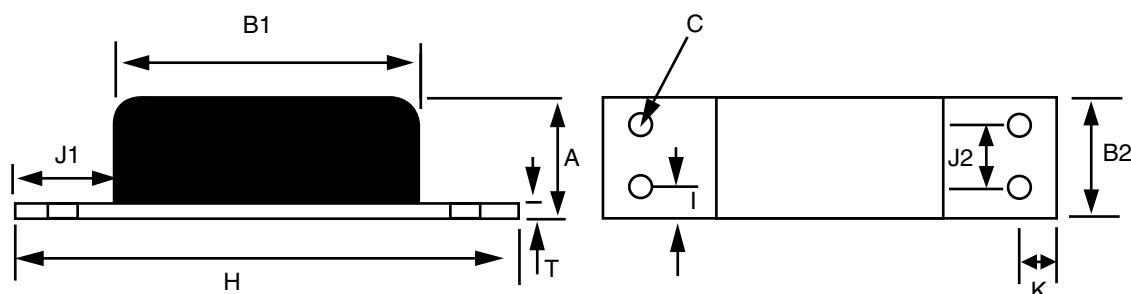

Part No.	A	B1	B2	C	H	I	J1	J2	K	T	STATIC LOAD Kg	DEF mm	BUFFING LOAD Kg	DEF mm	Weight Kg
M50925080AN55*	70	70	50	8.5	130	25	30	-	15	5	120	10	1000	30	0.5
M50924472AN55	80	120	100	13	200	25	40	50	20	10	700	10	3600	29	2.4
M50921422AN55	70	150	120	15	250	30	50	60	25	10	1300	9	6000	24	3.4
M50921055AN55	80	200	150	17	300	35	50	80	25	15	2250	10	10000	25	7.1

*Two hole fixing

All properties nominal, contact Mackay for Technical advice

All Dimensions in Millimetres

© Mackay Consolidated Industries Pty Ltd 2015
www.mackayrubber.com.au


FEATURES

This rectangular buffer is easily fitted. Reduction of transmitted shock loads enables equipment to be designed more economically.

This buffer is designed to protect structures and equipment from impact forces. It is usually fitted as non-metallic stops or incorporated in vehicle suspension systems to provide progressive stiffening under increasing load.

Typical applications:


- Dump trucks
- Off-road vehicles
- Cranes
- Handling equipment
- Vehicle suspensions

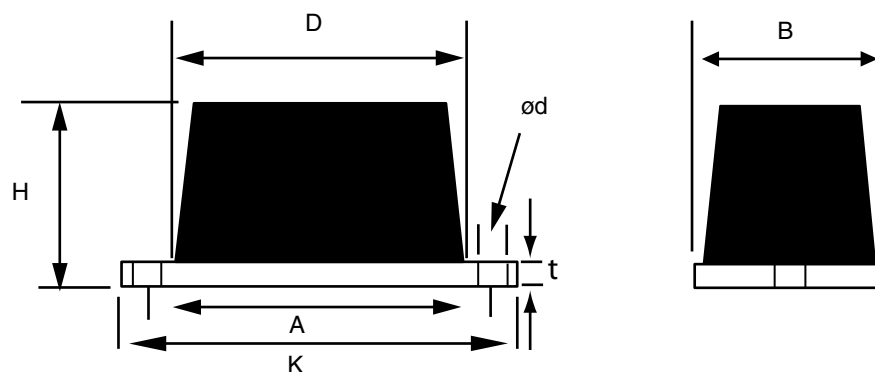

Part No	Dimensions							Compression		Weight Kg
	A	B	D	H	K	d	t	Load Kg	Def mm	
M15260	127	64	89	37	156	13.5	6.3	250	13	0.6

MOULDED DOCKING BUFFER

Ideally suited to truck trays and loading bays

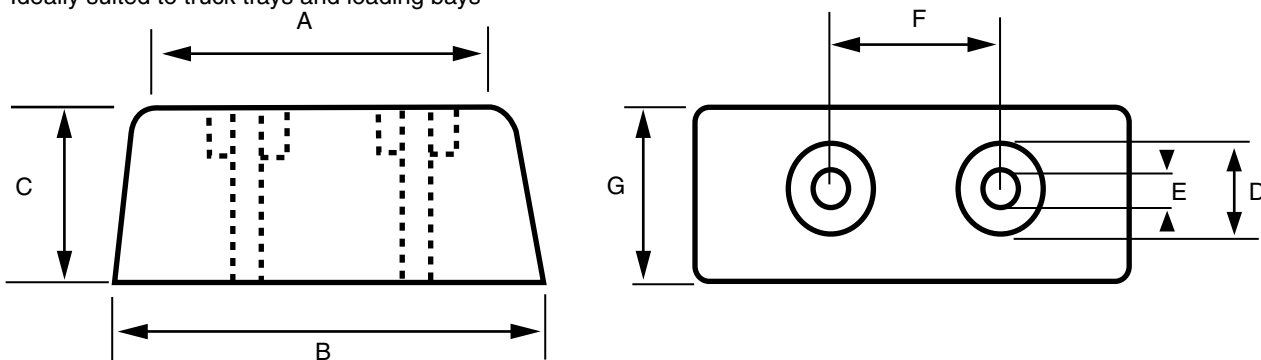

Part No.	A	B	C	D	E	F	G	Weight Kg
DB15090	145	150	90	40	13.5	75	76	1.2
DB15575	150	155	75	36	14	87	65	0.72
DB19555	185	195	50	32	11	120	55	0.62

All properties nominal, contact Mackay for Technical advice

All Dimensions in Millimetres